

# Lithium Iron Phosphate Battery

LFELI-51200 (51.2V200Ah)




## Features Of LiFePO4 Battery

- 20-year design life
- Extreme cycle life - up to 3500 cycles at 100% DOD
- Extreme temperature range: -4°F~140°F ( -20°C~60°C )
- Advanced Battery Management System (BMS) - System monitoring of voltage, current and temperature
- Built-in overcharge, overdischarge and overheat protection
- Advanced BMS communication protocols - Modbus, RS232 and RS485 (SNMP optional)
- Anti-theft tracking systems available - Gyroscope
- Flexibility in configuration - Supports parallel connection up to 40 modules
- Flame retardant system to UL94V-0 & >28% LOI
- Easy installation - 19"/23" standard cabinet or wall-mounted



## Physical Dimension-mm

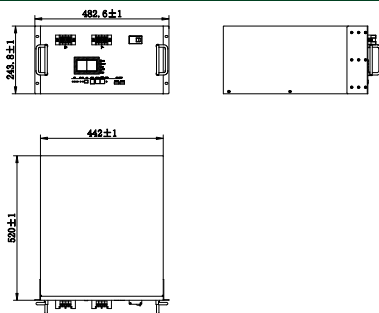

## Typical Applications

- Access Network Equipment
- Remote Switching Offices
- Mobile Communication Equipment
- Transmission Equipment
- Satellite Ground Stations
- Microwave Communication Equipment
- Communication field as backup power supply

Item	Parameters
Model	LFELI-51200
Rated Capacity (5HR)	200 Ah
Nominal Voltage	51.2V
Discharge Ending Voltage	43.2V
Charging Limited Voltage	57.6V
Max. Charging/Discharge Current	100A (Maximum Overcurrent 150A or 200A)
Weight	Approx. 83KG
Energy	10240Wh
Display	With LCD display
Max. number of parallel connection	40
Dimensions (W*D*H) mm	442*520*244
Design Life	20 years
Cycle Life	6000 cycles
IP Class	IP30
Case Material	SPCC
Operating Temperature	Charging: 0 to +45°C, Discharging: -10 to +55°C, Storage: -20 to +60°C
Terminal	M6
Certification	/

## Constant Current Discharge Table (Amperes) at 25°C

Voltage \ Time	2 h	4 h	6 h	10 h	20 h
End of discharge voltage 43.2V	100A	50A	33.3A	20 A	10 A

## Constant Power Discharge Table (Watts) at 25°C

Voltage \ Time	2 h	4 h	6 h	10 h	20 h
End of discharge voltage 43.2V	5120W	2560W	1706.6W	1024W	512W