

# Lithium Iron Phosphate Battery

## LFELI-48200 (48V200Ah)




### Features Of LiFePO4 Battery

- 20-year design life
- Extreme cycle life - up to 6000 cycles at 80% DOD
- Extreme temperature range: -4°F~140°F ( -20°C~60°C )
- Advanced Battery Management System (BMS) - System monitoring of voltage, current and temperature
- Built-in overcharge, overdischarge and overheat protection
- Advanced BMS communication protocols - Modbus, RS232, RS485
- Anti-theft systems available - Gyroscope
- Flexibility in configuration - Supports parallel connection of up to 15 modules
- Easy installation - 19"/23" standard cabinet or wall mounting



### Physical Dimension-mm

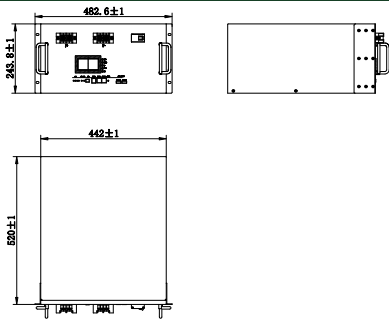

### Typical Applications

- Access Network Equipment
- Remote Switching Offices
- Mobile Communication Equipment
- Transmission Equipment
- Satellite Ground Stations
- Microwave Communication Equipment
- Communication field as backup power supply

Item	Parameters
Model	LFELI-48200
Rated Capacity (5HR)	200 Ah
Nominal Voltage	48V
Discharge Ending Voltage	40.5V
Charging Limited Voltage	54V
Max. Charging/Discharge Current	100A
Weight	Approx. 79.3KG
Energy	9600Wh
Display	With LCD display
Max. number of parallel connection	15
Dimensions (W*D*H) mm	442*520*244
Design Life	20 years
Cycle Life	6000 cycles
IP Class	IP30
Case Material	SPCC
Operating Temperature	Charging: 0 to +45°C, Discharging: -10 to +55°C, Storage: -20 to +60°C
Terminal	M6

### Constant Current Discharge Table (Amperes) at 25°C

Voltage \ Time	2 h	4 h	6 h	10 h	20 h
End of discharge voltage 40.5V	100A	50A	33.3A	20A	10A

### Constant Power Discharge Table (Watts) at 25°C

Voltage \ Time	2 h	4 h	6 h	10 h	20 h
End of discharge voltage 40.5V	4800W	2400W	1600W	960W	480W